




SMS Shoalbuster

Shoalbuster 2609

Optimised for operation on site in shallow waters and able to carry out a wide range of lifting, anchor handling and transportation services and also have a significant coastal towing capability. SMS Shoalbuster has proved to be an outstanding performer in the marine civil engineering and dredging arena. Her raised bow and foredeck allows her to hold a Bureau Veritas unrestricted navigation certificate and still operate in shallow waters.

Deck Layout

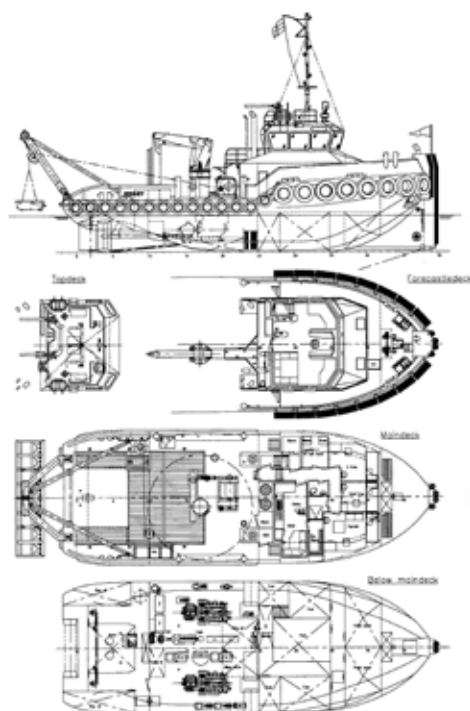

Specifications

Boat Name	SMS Shoalbuster
Port of Registry	Southampton
Type or Description	Shoalbuster 2609
IMO Number	509WB0260750
Official Number	916038
Call Sign	2BYF6
MMSI Number	235070418
Build Date	June 2009
LOA	26.02 metres
Beam	9.01 metres
Draft	2.6 metres
Deck Space/Area	70 metre ²
Deck Load	37,000 Kgs
Class	MCA Cat 1 150miles from a safe haven Bureau Veritas 1 + Hull AUT – U MS Unrestricted
Propulsion	2 Type Caterpillar 3508B Power 1100 BHP (1,640 Kw) each
Bow Thruster	200hp Hydraulic
Cooling	Keel cooled
Speed	11.4 knots
Bollard Pull	31.1 tonne average
Auxiliary Engines	1 x Caterpillar C – 9 TA 269Kw Hydraulic Set
Generator(s)	Number 2 & Output Caterpillar C – 4.4 TA 86Kva
Deck Equipment	Crane Heila HLRM 140 – 4SL 5.3 tonne @ 18.03 metre 16.8 tonne @ 7.69 metre Winches 50 tonne anchor/towing AMW – H – 400 double drum 8 tonne Brevini tugger winch
Store/Workshop Area	Yes
Fuel Capacity	126 metre ³ transferrable @ 32 metre ³ & metered
Water Capacity	30.3 metre ³ transferrable @ 28 metre ³ & metered
Navigation Equipment	Magnetic compass Electronic compass 2 x radar 2 x GPS Electronic chart plotter Echo sounder Watch keeper alarm AIS Navtex Talkback unit Speed log
Comms Equipment	Cell (GSM) phone 2 x Inmarsat C satellite phone SSB radio 2 x VHF radio + 2 hand held Email
Other Equipment	Stern roller Towing hook/bit Mampaey DCX 30/45 Aft hydraulic pins Towing pins Deck flood lights
Accommodation	Licensed for 12 persons, 1 double + 4 single cabins Messing facilities Heated & air-conditioned

Crane Lifting Capacity (fwd)

